

# Hot & Cold Can Vending Machine

## FAA30L6RT5NY

- 30 selection 30 button (18 Pet Bottle)
- Annual power consumption: 575 kW·h, 220 V supported (50 Hz/60 Hz)
- External dimensions: height 1,830 mm x width 1,181 mm x depth 731 mm



### Rack configuration and hot/cold product segmentation

H/C				H/C		Cold-only			
1	B	7	B	13	P2	19	P2	25	P1
2	B	8	B	14	P2	20	P2	26	P1
3	B	9	B	15	P2	21	P2	27	P1
4	B	10	B	16	P2	22	P2	28	P1
5	BS	11	BS	17	P2	23	P2	29	P1
6	BS	12	BS	18	P2	24	P2	30	P1

### Rack types and product compatibility

- B : Normal cans  
 BS : Short cans  
 P1 : Wide PET bottles  
 (Max. product height: 228 mm)  
 P2 : 500 ml PET bottles

### Capacity

- Slim cans: 595      PET bottles: 270  
 Wide cans: 450

Made in Japan

Diversification of vended product  
**3**-column  
 Equipped with 3-column PET bottle rack

New function  
**DC**  
 Equipped with new type DC vending mechanism

Energy savings  
**LED**  
 Equipped with LED lighting

Energy savings  
**HYBRID**  
 HEAT PUMP  
 Hybrid heat pump

New design  
  
 Use of a wide display

## Advantages

### Interface encourages willingness to purchase

Wide panel display promotes the products  
Clean appearance additionally encourages consumer willingness to purchase

### Diversification of vended products

Product diversification enhances the sales channel expansion of the vending machine

### Decrease in vending problems


Reduction of lost vending opportunities  
Increase in rate of repeat purchases due to improved reliability

## Specifications

Model	FAA30L6RT5NY
External dimensions	Height 1,830 x Width 1,181 x Depth 731 (mm)
Product mass (weight)	247kg
Lighting	LED
Cooling device (refrigerant)	Compressor: reciprocating type, 6.36 cm
Heating device	Sheathed heater: 310 W + 310 W
Power consumption	C:C:C 288w/288w H:C:C 188w/188w C:H:C 494w/494w H:H:C 534w/534w
Power supply	Single-phase, 220 V ±10 V, 50/60 Hz
Electrical outlet capacity	15A
Adjustable interior capacity	1536L
Annual power consumption	575kW·h Value measured according to JIS B 8561:2007
The machine is Available to provide for Singapore, Malaysia, Thailand. Please contact us for other countries and regions.	

## Equipped with 3-column PET bottle rack

- Improved freedom for vending different types of products
- Wide PET bottle rack (P1) supports the need for vending large-size products (Max. product height: 228 mm)

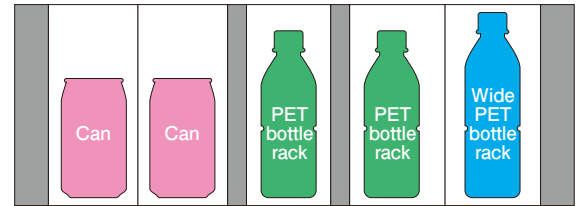


## Equipped with new type DC vending mechanism

Sold-out sensor mounted in the vending mechanism detects product jams.


<When a product jam occurs>

- ① Product jam is reduced by the addition of a retry function.
- ② For a cash purchase, a refund or other product selection is also possible.
- ③ Vending to the next customer from the jammed column is prevented.

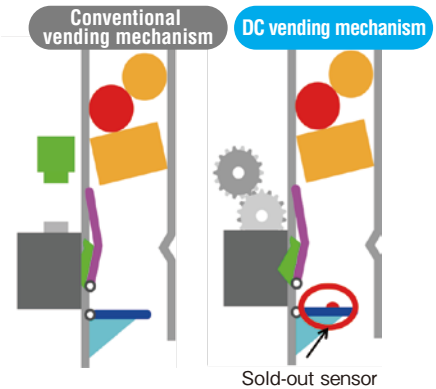

## Energy savings

- Improved capability of the inverter, compressor control, and insulation
- Equipped with LED Lighting  
Due to the long service life of the LEDs, lampreplacements, such as for fluorescents, are not required.
- Equipped with a hybrid heat pump

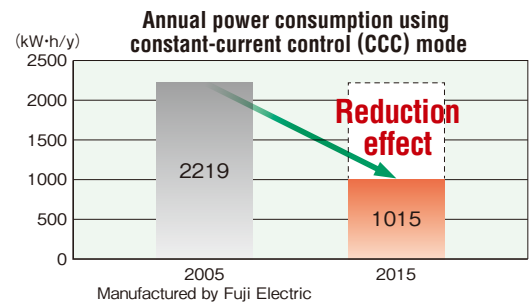

## Reduction of running cost

- Running cost is reduced due to the newly equipped functions and improved energy-saving efficiency.  
The advantages of a new type of machine are large, when looking at a long-term span (of three years and more).

